DS-2CE18D0T-LFS
2 MP Dual Light Audio Fixed Bullet Camera



- High quality imaging with 2 MP, 1920 × 1080 resolution
- 2.8 mm, 3.6 mm and 6 mm fixed focal lens
- Up to 60 m IR distance for bright night imaging
- Up to 60 m white light distance for bright night imaging
- High quality audio with audio over coaxial cable, built-in mic
- One port for four switchable signals (TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

▪ Specification

Camera	
Image Sensor	2 MP CMOS
Max. Resolution	1920 (H) × 1080 (V)
Min. Illumination	0.01 Lux @ (F2.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Day ＆ Night	ICR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 180°, Rotation: 0 to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	Fixed focal lens, 2.8 mm, 3.6 mm and 6 mm optional
Focal Length ＆ FOV	2.8 mm, horizontal FOV: 101°, vertical FOV: 56°, diagonal FOV: 118° 3.6 mm, horizontal FOV: 78°, vertical FOV: 42°, diagonal FOV: 92° 6 mm, horizontal FOV: 49.2°, vertical FOV:28.3 °, diagonal FOV: 56.1°
Lens Mount	M12
Illuminator	
Supplement Light Type	White Light,IR
Supplement Light Range	IR : Up to 60 m White Light : Up to 60 m
Image	
Image Settings	Anti-Banding, Brightness, Sharpness, Smart IR
Frame Rate	TVI: 1080P @ 30 fps, 1080P @ 25 fps AHD: 1080P @ 30 fps, 1080P @ 25 fps CVI: 1080P @ 30 fps, 1080P @ 25 fps CVBS: PAL/NTSC
Day/Night Mode	Auto/Color/BW (Black and White)
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	DWDR/BLC/HLC/Global
White Balance	Auto/Manual
AGC	Yes
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Power	12 VDC ± 25%, max.9.8 W,*You are recommended to use one power adapter to supply the power for one camera.
Material	Front cover: Metal Main body: Plastic
Dimension	192.6 mm × 178.3 mm × 71 mm (7.58" × 7.02" × 2.8")
Weight	Approx. 738 g (1.63 lb.)
Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Communication	HIKVISION-C
Language	English
Approval	
Protection	IP67

**Note：This product is not recommended for use in narrow spaces.*

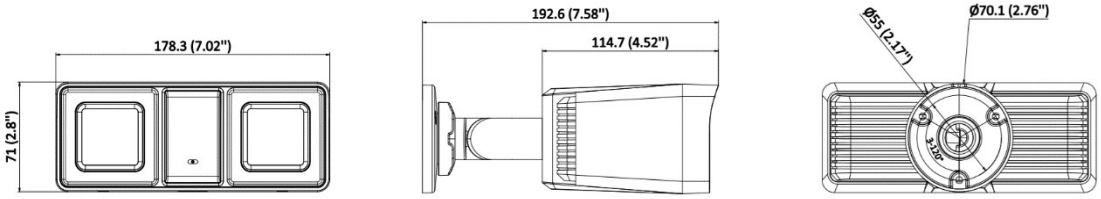
▪ Available Model

DS-2CE18D0T-LFS(2.8mm)

DS-2CE18D0T-LFS(3.6mm)

DS-2CE18D0T-LFS(6mm)



▪ Dimension



Unit:mm (inch)

▪ Accessory

▪ Optional

DS-2280ZJ Wall Mount	DS-1280ZJ-XS Junction Box
	
	

Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision HikvisionHQ HikvisionHQ Hikvision_Global Hikvision Corporate Channel hikvisionhq

©Hikvision Digital Technology Co., Ltd. 2023 | Data subject to change without notice |