

DS-D5027F2-1P2(海外标配)(英标)
27 inch FHD Borderless Monitor




- 100 Hz refresh rate, more fluid and life-like video.
- IPS technology for wide, 178° ultra-wide view screen.
- Ultra-thin device body with ultra-thin border for 3 sides.
- 8 bit LVDS FHD (1920 × 1080) display.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

▪ Specification


Display	
Screen Size	27 inch
Active Display Area	597.888 (H) mm × 336.312 (V) mm
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.3114 (H) mm × 0.3114 (V) mm
Brightness	300 cd/m ²
Viewing Angle	178° (H) / 178° (V)
Color Depth	8 bit, 16.7 M
Contrast Ratio	1300 : 1
Response Time	14 (Typ) ms , 5 (OD) ms
Refresh Rate	Max. 100Hz , Typ. 60 Hz
Haze	Haze 25%, 3H
Reliability	7 × 12 H
Color Gamut	72% NTSC
Interface	
Video & Audio Input	HDMI 1.4 × 1, VGA × 1
Video & Audio Output	None
Data Transmission Interface	None
Control Interface	None
Power	
Power Supply	DC 12V, 2.5A
Power Consumption	≤ 30 W
Standby Consumption	≤ 0.5 W
Working Environment	
Working Temperature	0°C to 40 °C (32 °F to 104 °F)
Working Humidity	20% to 90% RH (Non-Condensing)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% to 90% RH (Non-Condensing)
General	
Casing Material	Plastic
VESA	100 mm × 100 mm (4-M4 × 10 mm)
Bezel Width	2.1 mm (top/left/right), 21.4 mm (bottom)
Product Dimensions (W × H × D)	With base: 613 (W) mm × 449.7 (H) mm × 216(D) mm Without base: 613 (W) mm × 367.3 (H) mm × 41.3 (D) mm
Package Dimensions (W × H × D)	690 (W) mm × 450 (H) mm × 140 (D) mm
Net Weight	3.93 ± 0.5 kg
Gross Weight	5.36 ± 0.5 kg
Packing List	Monitor × 1, Base component × 1, Power adapter (12 V, 2.5 A) × 1, HDMI cable (1.5 m) × 1, User manual × 1, Multilingual manual × 1
Remarks	The base is included by default. The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information

▪ Physical Interface

Interface	Description	Interface	Description
HDMI	HDMI 1.4 digital signal input interface	VGA	VGA analog signal input interface
DC	DC 12V 2.5A input interface		



HDMI



VGA




DC

▪ Available Model

DS-D5027F2-1P2(英标)

▪ Dimension

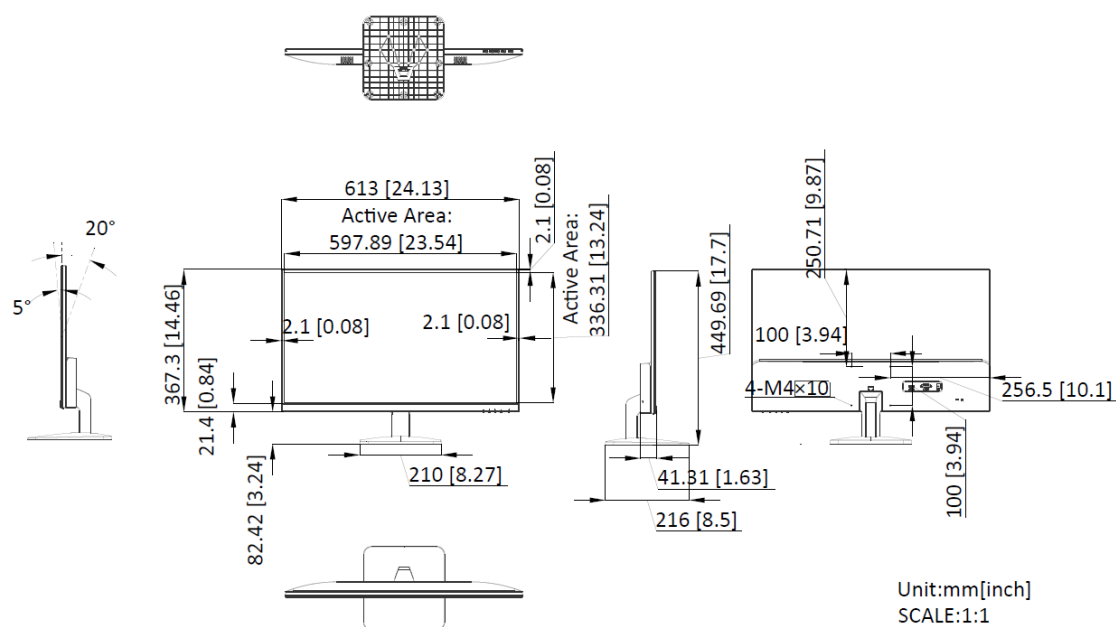

▪ Accessory

▪ Optional

DS-DM1940W



See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION[®]