

**DS-K1109DKFB-QR**  
**Card Reader**

- Supports RS-485 and Wiegand (W26, W34) protocol
- Supports reading DESfire card, Felica card and M1 card
- Supports authentication via card, password, fingerprint and QR code
- Supports bluetooth module (when connecting by RS-485)
- Tamper-proof function
- Max. 5000 fingerprint capacity

## ▪ Specification

Interface	
TAMPER	1
RS-485	1 RS-485. Supports OSDP protocol, Baud 9600, 19200, 38400
Wiegand	1
Capacity	
Fingerprint capacity	5000
Authentication	
Card type	M1 card, DESfire card, Felica card
General	
Power supply	12 VDC
Power consumption	With load: ≤ 14 w Without load: ≤ 4 w
Working temperature	-40 °C to 65 °C (-40 °F to 149 °F)
Working humidity	0 to 90% (no condensing)
Protective level	IP65
Dimensions	125 mm × 84.5 mm × 18 mm (4.92" × 3.33" × 0.71")
Installation	Wall mounting
Weight	≤ 1 kg (2.20 lb)
Buzzer	Support
Function	
Barcode recognition	Support Format: Code 128, Interleaved 2 of 5, Matrix 2 of 5, Code 39, Codebar, Code 9 and UCC/EAN-128
QR code recognition	Support (when connecting by RS-485)


## ▪ Available Model

DS-K1109DKFB-QR(STD)

DS-K1109DKFB-QR(STD)/Shou BOX Part

DS-K1109DKFB-QR(NEU)

## ▪ Dimension

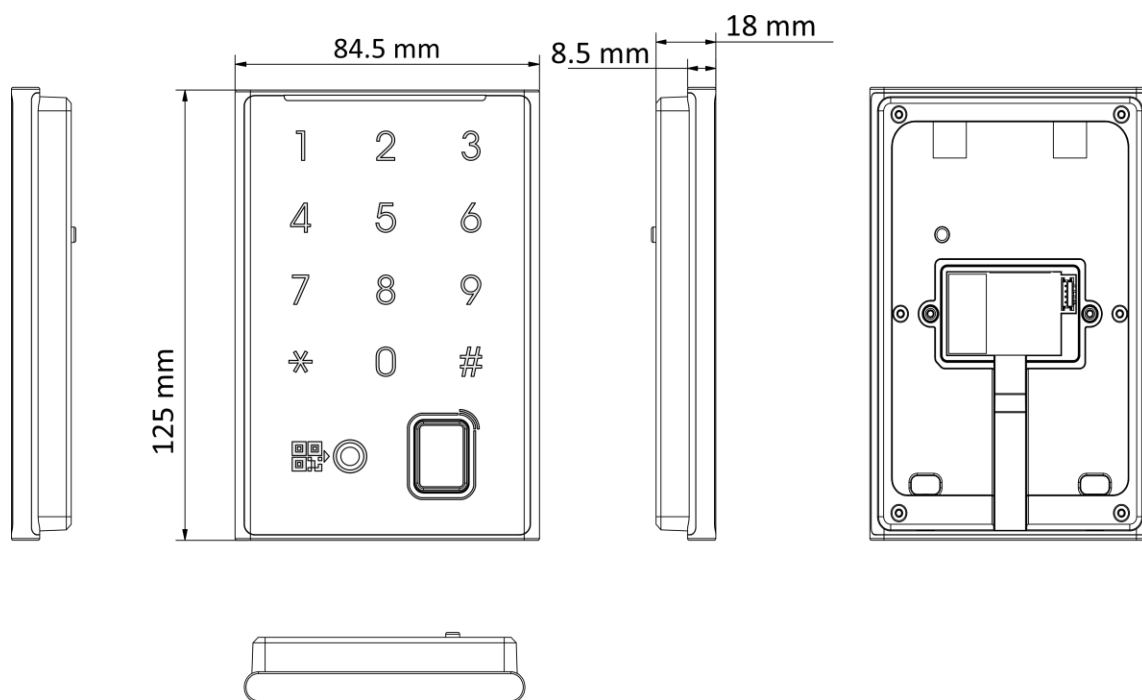

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

