

## DS-K1T321EWX Face Recognition Terminal



Face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- 2.4-inch LCD screen, 2 MP lens
- Multiple authentication methods, including face, card (EM card), and PIN, etc.
- Max. 500 faces, 3000 cards, and 150,000 events
- Face recognition duration < 0.2 s/User
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the PC web client and mobile web client
- Supports wired network and Wi-Fi (AP mode)
- Supports wiring with secure door control unit or card reader via RS-485





## ▪ Specification

| Display             |                                                                                                                        |
|---------------------|------------------------------------------------------------------------------------------------------------------------|
| Screen size         | 2.4 inch                                                                                                               |
| Type                | LCD                                                                                                                    |
| Video               |                                                                                                                        |
| Lens                | 1                                                                                                                      |
| Resolution          | 2 MP (video stream: 720P)                                                                                              |
| FOV                 | HFOV = 25°; VFOV = 43°                                                                                                 |
| Network             |                                                                                                                        |
| Wired network       | Support                                                                                                                |
| Wi-Fi               | Support, 2.4 G, 802.11b/g/n                                                                                            |
| Interface           |                                                                                                                        |
| Network interface   | 1 RJ-45, 10/100 M self-adaptive                                                                                        |
| Lock control        | 1                                                                                                                      |
| Exit button         | 1                                                                                                                      |
| Door contact input  | 1                                                                                                                      |
| TAMPER              | 1                                                                                                                      |
| RS-485              | 1 RS-485 (Half duplex, HIKVISION)                                                                                      |
| USB                 | 1                                                                                                                      |
| Authentication      |                                                                                                                        |
| Card type           | EM card                                                                                                                |
| General             |                                                                                                                        |
| Power supply        | 12 VDC                                                                                                                 |
| Power consumption   | ≤ 6 W                                                                                                                  |
| Working temperature | -10 °C to 55 °C (14 °F to 131 °F)                                                                                      |
| Working humidity    | 0 to 90% (No condensing)                                                                                               |
| Language            | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese |
| Keypad              | Support                                                                                                                |
| Function            |                                                                                                                        |
| Face anti-spoofing  | Support                                                                                                                |
| Hik-Partner Pro     | Support                                                                                                                |
| Face recognition    | Support                                                                                                                |

## ▪ Available Model

DS-K1T321EWX

## ▪ Dimension

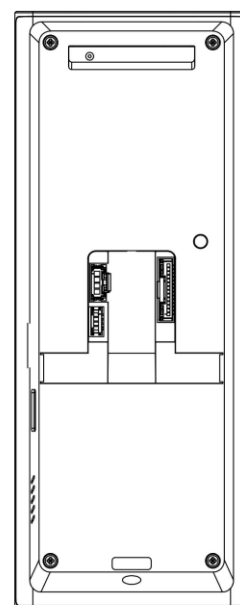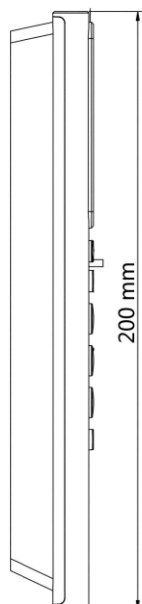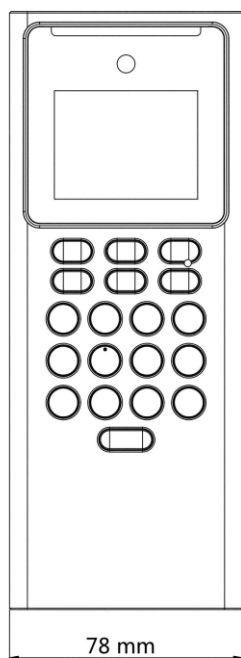

▪ **Accessory**

▪ **Optional**

| DS-KAB321-B1<br>Bracket                                                             | DS-KAB321-B2<br>Bracket                                                             |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
[www.hikvision.com](http://www.hikvision.com)



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq