

DS-KH6352-WTDE6(B)
4-Wire Hybrid HD Indoor Station



- 7-inch TFT touch screen with 1024 × 600 resolution
- Receive calls, open the door and live view remotely
- Plug & Play
- Hik-Connect mobile control

▪ Specification


System parameters	
Operation system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
Processor	Embedded high performance processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful TFT
Resolution	1024 × 600
Luminance	250 cd/m ² (Typ)
Viewing Angle	Horizontal 160°, vertical 130°
Contrast	700 (Typ)
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711U, G.711A
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kps
Audio quality	Noise suppression and echo cancellation
Capacity	
Linked indoor extensions capacity	2
Linked doorphone capacity	2 analog doorphones
Analog Camera	1
Network parameters	
Wi-Fi	Wi-Fi 802.11 b/g/n
Device interfaces	
Alarm input	2
Network interface	/
RS-485	/
TF card	Support TF card, up to 128 G
Alarm output	/
Four-Wire interface	4
Power interface	1
Debugging port	2
Relay	/
General	
Button	0 physical button(s)
Installation	Surface mounting
Indicator	/
Weight	With package: 708g (1.56 lb), Without package: 260 g (0.5973 lb)
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	175 mm × 113.5 mm × 18.1 mm (6.89" × 4.47" × 0.71")

Power supply	12 VDC
Application environment	Indoor
Power consumption	≤ 5 W
Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese (Brazil), Spanish, Hebrew, Romanian, Turkish, Estonian, Danish, Swedish, Norwegian, Finnish, Vietnamese, Croatian, Slovenian, Serbian, Arabic, Portuguese (Portugal), Lithuanian, Uzbek, Kazakh, Mongolian, Ukrainian, Latvian, Traditional Chinese
Material	Plastic

▪ Available Model

DS-KH6352-WTDE6(B)

▪ Dimension

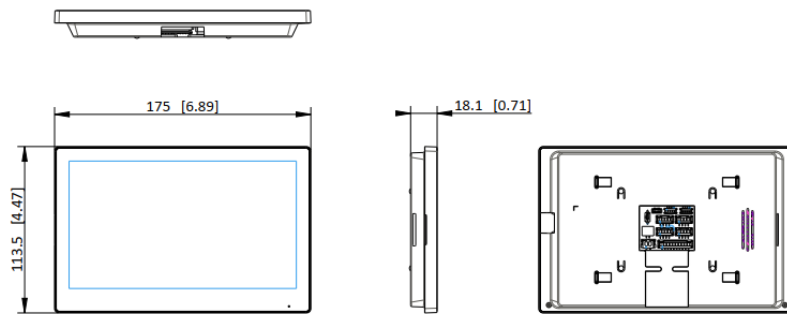

Unit:mm [inch]

SCALE	1:1
-------	-----

▪ Accessory

▪ Optional

DS-KABH6350-T



See Far, Go Further



www.hikvision.com
support@hikvision.com

