


Network Video Recorder NVR509-E-IM Series

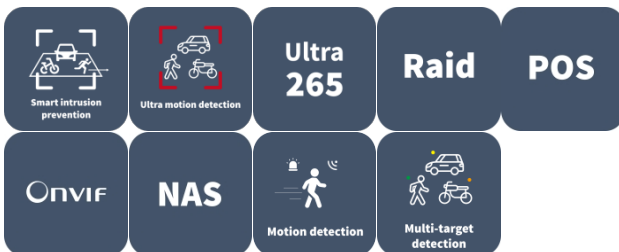

Features

- Support Ultra 265/H.265/H.264 video formats
- Support 16/32/64-channel input
- Support 2 HDMI and 2 VGA. VGA1 and HDMI1 simultaneous output, VGA2 and HDMI2 simultaneous output. VGA1/HDMI1 and VGA2/HDMI2 independent output
- Support up to 32 Megapixels resolution recording
- Support N+1 Hot spare
- Support ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications

Model	NVR509-16E-IM	NVR509-32E-IM	NVR509-64E-IM
Decoding			
Decoding Format	Ultra 265, H.265, H.264		
Decoding Capability	Smart Off: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30 Smart On: 1 x 32MP@30, 3 x 16MP@30, 4 x 12MP@30, 6 x 4K@30, 8 x 6MP@30, 9 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30	Smart Off: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30 Smart On: 1 x 32MP@30, 3 x 16MP@30, 4 x 12MP@30, 6 x 4K@30, 8 x 6MP@30, 9 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 24 x 1080P@30, 32 x 720P@30	Smart Off: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 64 x 720P@30 Smart On: 1 x 32MP@30, 3 x 16MP@30, 4 x 12MP@30, 6 x 4K@30, 8 x 6MP@30, 9 x 5MP@30, 12 x 4MP@30, 16 x 3MP@30, 24 x 1080P@30, 48 x 720P@30, 64 x D1
Decoding Capability Description	The resolution of each channel cannot exceed 8192 pixels in length or width		
Audio Compression	G.711A, G.711U		
Network			
Incoming Bandwidth	Smart Off: 384 Mbps, Smart On: 200 Mbps		
Outgoing Bandwidth	Smart Off: 384 Mbps, Smart On: 200 Mbps		
Max Users Can Be Added	128		
Remote Users	128		
Maximum Number of Clients	/		
Maximum Number of Simultaneous Forwarding Streamings	/		
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE, HTTP, HTTPS, DNS, DDNS, SNMP, SMTP, NFS, RTSP, 802.1x, IPv6, IPv4		
Browser (Plugin)	IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+		
Browser (Plugin-Free)	Chrome 57+, Edge 16+, Firefox 58+, Safari 11+		
Video/Audio Input			
IP Video Input	16-ch	32-ch	64-ch
BNC Audio Input	N/A		
RCA Audio Input	1-ch		
3.5mm Audio Input	N/A		
Peripheral Input			
POS	All channels		
Video/Audio Output			
Video Output	Support 2-ch HDMI, 2-ch VGA, HDMI1 and VGA1 simultaneous output, HDMI2 and VGA2 simultaneous output, HDMI1/VGA1 and HDMI2/VGA2 independent output		


HDMI Output	4K (3840 × 2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
VGA Output	1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz		
HDMI Standard	HDMI2.0		
BNC Audio Output	N/A		
RCA Audio Output	2-ch		
Liveview Display	1/4/6/8/9/16	HDMI1 and VGA1: 1/4/6/8/9/16/25/32; HDMI2 and VGA2: 1/4/6/8/9/16	HDMI1 and VGA1: 1/4/6/8/9/16/25/36/64; HDMI2 and VGA2: 1/4/6/8/9/16
Default Num of Live Screen	16	HDMI1 and VGA1: 32; HDMI2 and VGA2: 16	HDMI1 and VGA1: 64; HDMI2 and VGA2: 16
Corridor Mode Screen	3/4/5/7/9/10/12/16	HDMI1 and VGA1: 3/4/5/7/9/10/12/16/32; HDMI2 and VGA2: 3/4/5/7/9/10/12/16	HDMI1 and VGA1: 3/4/5/7/9/10/12/16/32; HDMI2 and VGA2: 3/4/5/7/9/10/12/16
3.5mm Audio Output	N/A		
Playback Screen	1/4/9/16		
Corridor Mode Screen of Playback	1/3		
Two-way Audio			
Two-way Audio	1-ch, RCA (Using the audio input and output)		
Snapshot			
FTP/Schedule/Event Snapshot	16-ch snapshot (max. 8 MP (3840 × 2160) video resolution, with 1080P snapshot resolution)		
Recording			
Recording Resolution	32 MP/16 MP/12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF		
Num of Concurrent Playback	32-ch		
Synchronous Playback in Local	16-ch		
Smart Function			
Smart by IPC	All channels (up to 16 images/s in total) Face Detection, Face Comparison, Vehicle Detection (LPR), Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring		
Smart by NVR	Face Detection, Face Comparison, Smart Intrusion Prevention (SIP), Ultra Motion Detection (UMD), Video Metadata, (At same channel, only one smart function by NVR can be enabled simultaneously.)		
Smart by NVR Analyzer Mode	Mixed Mode (SIP+UMD), Mixed Mode (Face Recognition+Mixed-Traffic Detection+AcuSearch/AcuTrack), Modes cannot active simultaneously, only one mode can active at a time.		
VCA Search	AcuSearch, SmartSearch+, Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, Heat Map		
AcuSearch			
Acu Search Performance	All channels with UNV SIP/UMD Camera Up to 16-ch	All channels with UNV SIP/UMD Camera Up to 32-ch	All channels with UNV SIP/UMD Camera Up to 32-ch

	with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)	with normal camera (UNV and Third-part brand, 32-ch 2MP, 16-ch 4MP, 8-ch 4K)	with normal camera (UNV and Third-part brand, 32-ch 2MP, 16-ch 4MP, 8-ch 4K)
AcuTrack			
Acu Track Performance	All channels with UNV SIP/UMD Camera Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)	All channels with UNV SIP/UMD Camera Up to 32-ch with normal camera (UNV and Third-part brand, 32-ch 2MP, 16-ch 4MP, 8-ch 4K)	All channels with UNV SIP/UMD Camera Up to 32-ch with normal camera (UNV and Third-part brand, 32-ch 2MP, 16-ch 4MP, 8-ch 4K)
by NVR	Up to 16-ch with UNV Face Detection Camera Up to 6-ch with normal camera (UNV and Third-part brand, 6-ch 2MP, 3-ch 4MP, 1-ch 4K)	Up to 32-ch with UNV Face Detection Camera Up to 6-ch with normal camera (UNV and Third-part brand, 6-ch 2MP, 3-ch 4MP, 1-ch 4K)	Up to 32-ch with UNV Face Detection Camera Up to 6-ch with normal camera (UNV and Third-part brand, 6-ch 2MP, 3-ch 4MP, 1-ch 4K)
Search by Image	Support		
SIP			
SIP by NVR with normal cameras	Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)	Up to 24-ch with normal camera (UNV and Third-part brand, 24-ch 2MP, 12-ch 4MP, 6-ch 4K)	Up to 24-ch with normal camera (UNV and Third-part brand, 24-ch 2MP, 12-ch 4MP, 6-ch 4K)
UMD			
UMD by NVR with normal cameras	Up to 16-ch with normal camera (UNV and Third-part brand, 16-ch 2MP, 8-ch 4MP, 4-ch 4K)	Up to 32-ch with normal camera (UNV and Third-part brand, 32-ch 2MP, 16-ch 4MP, 8-ch 4K)	Up to 32-ch with normal camera (UNV and Third-part brand, 32-ch 2MP, 16-ch 4MP, 8-ch 4K)
Video Metadata			
Video Metadata by NVR with normal cameras	Up to 6-ch with normal camera (UNV and Third-part brand, 6-ch 2MP, 3-ch 4MP, 1-ch 4K)		
Video Metadata Type	Motor Vehicle: Vehicle Type, Vehicle Color, Vehicle Brand, Direction, Plate Type, Plate Color, Non-Motor Vehicle: Non-Motor Vehicle Type, Direction, Gender, Age, Upper Garment Length, Upper Garment Color, Human Body: Gender, Age, Mask, Hairstyle, Bag Style, Direction, Upper Garment Length, Lower Garment Length, Upper Garment Color, Lower Garment Color		
Plate Comparison			
Vehicle Number Library	Up to 5 vehicle picture libraries, with up to 25,000 vehicle pictures in total		
Capacity of Smart Snapshots			
Capacity of Snapshot Records	3 millions records for face snapshot, 2 millions records for vehicle snapshot, 2 millions records for SIP		
Alarm			
General Alarm	Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Audio Detection, Alarm Input		
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal, Array Damaged, Array Degraded		
Num of Concurrent	One every 5 seconds		

Processing Alarms	
Hard Disk	
SATA	9 SATA Interfaces
Capacity	Up to 24 TB for each HDD (The maximum HDD capacity varies with environment temperature and hard disk size, The environment temperature for use should not exceed 40°C.)
Disk Group	Support
Redundant Storage	Support
Disk Array Type	RAID 0, 1, 5, 6, 10
Hot Swap	N/A
External Interface	
Network Interface	2 RJ45 10 M/100 M/1000 M self-adaptive Ethernet Interface
Network Working Mode	Multi-access, load balance, network fault-tolerance
USB	Front panel: 2 × USB2.0, Rear panel: 2 × USB3.0
RS485	1
RS232	1
Alarm In	16-ch
Alarm Out	10-ch
eSATA	1
miniSAS	N/A
Power Output	12 V
Extension Board	N/A
Buzzer	Support
Power Supply	AC 100 to 240 V
Power Switch	Support
Redundant Power Supply	N/A
PoE	
PoE Interface	N/A
Max Power	N/A
Supported Standard	N/A
Working Environment	
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	≤ 90% RH (non-condensing)
Power Consumption (without HDD)	≤ 40W
Heat Dissipation	Fan, Radiator
Dimensions	
Weight (without HDD)	≤5.5KG
Height	2U
Dimensions	442mm × 400mm × 86.1mm (17.4" ×15.7" ×3.4")
Certification	
Certification	CE; FCC; UL; RoHS; WEEE
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035
FCC	Part15 Subpart B

Compliance	
NDA Compliant	N/A
Feature Supported	
Cruise Lines Num of Each Camera	4
Preset Num	32
N+1 Hot Spare	Support
Fisheye Dewarping by IPC	Support
Fisheye Dewarping by NVR (Local)	Support (1 × 12 MP)
Dual-lens Cameras	Support
Box-Dome Linkage	Support
ANR	Support
Downlink ONVIF	Support (Profile S)
Uplink ONVIF	N/A
Video Image Database (Uplink)	Support
UCS (Web socket)	Support
NAS	Support
Ucode Basic Mode	Support
Ucode Advanced Mode	Support
Output Mode	Support
GUI Language	
GUI Language	38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian
Others	
Decoding Capability (1080P)	32

Dimensions

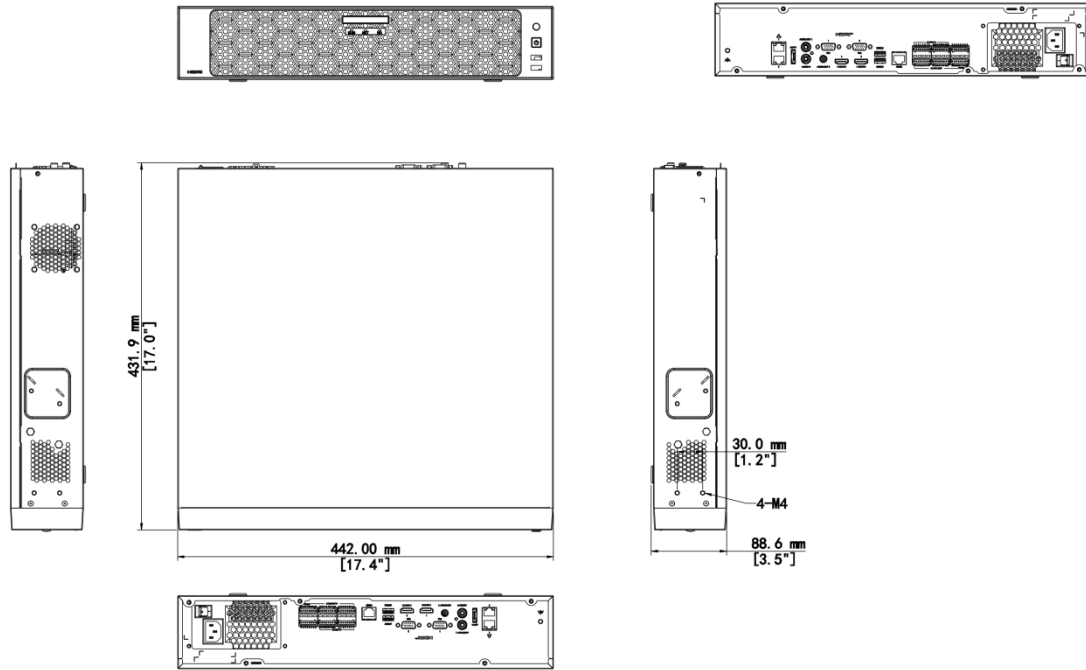

Unlimited New View

浙江宇视科技有限公司



<http://www.uniview.com>



overseasbusiness@uniview.com; globalsupport@uniview.com



South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

虽然我司试图在本资料中提供准确的信息，但不保证资料的内容不含有技术性误差或印刷性错误，为此我司对本资料中的不准确不承担任何责任。我司保留在没有通知或提示的情况下对本资料的内容进行修改的权利。