

## XVR-G3 Series



### Key Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920\*1080
- Long transmission distance over coax cable
- Supports mainstream cameras of ONVIF and RTSP protocols

### Specifications


Model	XVR-104G3	XVR-108G3
Video/Audio Input		
Analog Video Input	4-ch, BNC	8-ch, BNC
IP Video Input	2-ch(only IP up to 6ch), each channel up to 4MP	4-ch( only IP up to 8ch), each channel up to 4MP
Supported Analog Camera Types	<b>Support AHD input:</b> 5MP@20fps 4MP@30fps 1080P@30fps 720P@60fps <b>Support TVI input:</b> 5MP@20fps 4MP@30fps 1080P@30fps 720P@60fps <b>Support CVI input:</b> 5MP@20fps 4MP@30fps 1080P@30fps 720P@30fps <b>Support CVBS input</b>	<b>Support AHD input:</b> 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps <b>Support TVI input:</b> 5MP@12fps 4MP@15fps 1080P@30fps 720P@30fps <b>Support CVI input:</b> 1080P@30fps 720P@30fps <b>Support CVBS input</b>

Audio Input	1-ch, RCA			
Audio Compression	G.711U			
<b>Network</b>				
Incoming Bandwidth	16Mbps (Up to 24Mbps after all analog channel conversion)		32Mbps (Up to 40Mbps after all analog channel conversion)	
Outgoing Bandwidth	48Mbps		64Mbps	
Remote Users	128			
Protocols	TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP			
Browser	IE10/11 for Windows			
<b>Video/Audio Output</b>				
VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz			
HDMI Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz			
Audio Output	1-ch, RCA			
Synchronous Playback	HD:2-ch SD:4-ch		HD:4-ch SD:8-ch	
Live view display	HDMI/VGA: 1/4/6/8/9		HDMI/VGA: 1/4/6/8/9/10/16	
Two-way Audio	1-ch, RCA		1-ch, RCA	
<b>Encoding</b>				
Recording Resolution	5MP Lite/4MP Lite/1080P/720P/CIF		5MP Lite/4MP Lite /1080P/1080P Lite/720P/CIF	
Recording Frame Rate	<b>Main stream:</b>	<b>Sub stream:</b>	<b>Main stream:</b>	<b>Sub stream:</b>
	5MP Lite@12fps	D1@12fps	5MP Lite@6fps	D1@6fps
	4MP Lite@15fps	D1@15fps	4MP Lite@8fps	D1@8fps
	1080P@15fps	D1@15fps	1080P Lite@12fps	D1@12fps
	720P@25fps	D1@25fps	720P@12fps	D1@12fps
Audio Sample Rate	8KHz,16 bit per channel			
Audio Bit Rate	64Kbps per channel			
<b>Decoding</b>				
Capability	Analog: 2 x 5MP Lite@12, 2 x 4MP Lite@15, 2 x 1080P@15 IP: 1 x 4MP@30, 2 x 1080P@30		Analog: 4 x 5MP Lite@6, 4 x 4MP Lite@8, 4 x 1080P Lite @12fps IP: 1 x 4MP@30, 2 x 1080P@30	
<b>Hard Disk</b>				
SATA	1 SATA interface			
Capacity	Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)			
<b>General Alarm</b>				
General Alarm	By analog camera: Motion detection By IP Camera: Motion detection/Face detection			
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access			
<b>External Interface</b>				
Network Interface	1RJ45 10M/100M self-adaptive Ethernet Interface			

Con formato: Francés (Francia)


USB Interface	Rear panel:2 x USB2.0
General	
Power Supply	12V DC Power Consumption: $\leq 8$ W( without HDD )
Working Environment	$-10^{\circ}\text{C} \sim +55^{\circ}\text{C}$ ( $+14^{\circ}\text{F} \sim +131^{\circ}\text{F}$ ), Humidity $\leq 90\%$ RH(non-condensing)
Dimensions(WxDxH)	260mm $\times$ 218mm $\times$ 47mm (10.2" $\times$ 8.6" $\times$ 1.9")
Weight ( without HDD )	$\leq 1.1$ Kg ( 2.42lb )
Certification	
Certification	CE/FCC/WEEE

## Dimensions

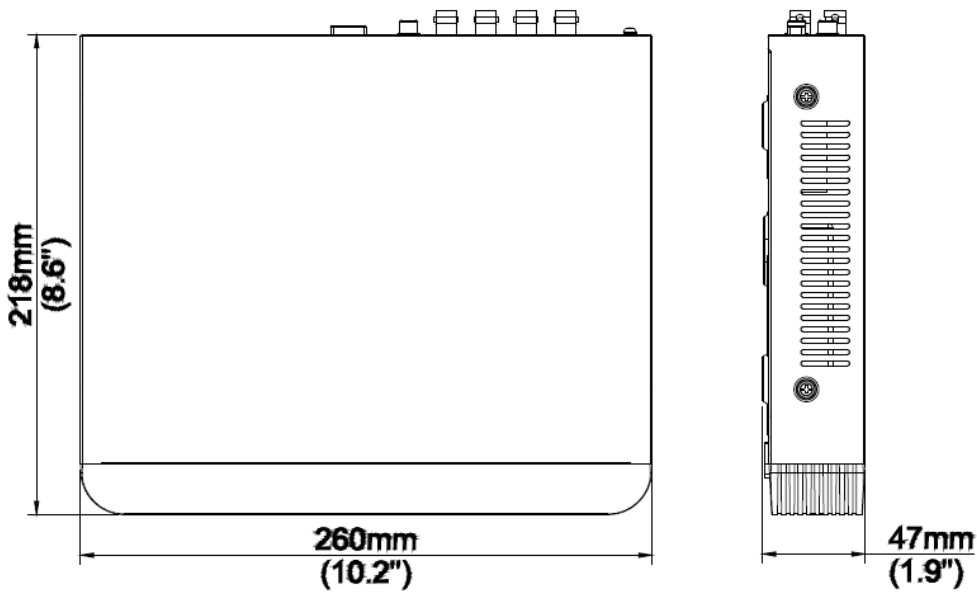

## Rear Panel

Take XVR-108G3 for example

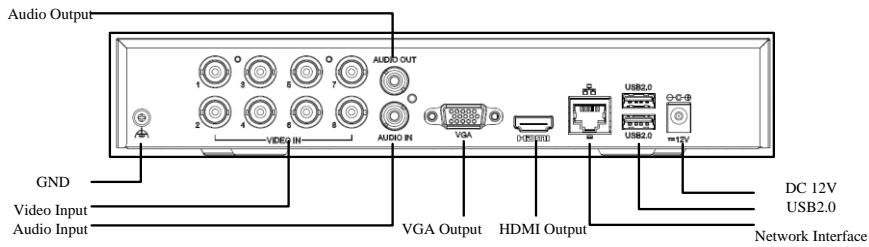

[www.uniview.com/uniarch](http://www.uniview.com/uniarch)

©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

